



P-Channel Enhancement Mode Field Effect Transistor




Top View

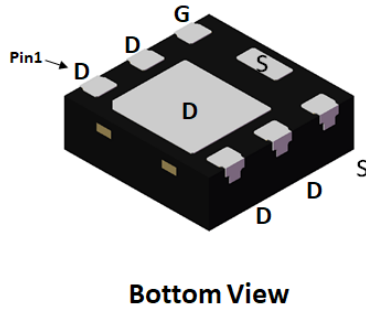

Bottom View

DFN2020-6L-WF



Product Summary

- V_{DS} -20V
- I_D -14A
- $R_{DS(ON)}$ (at $V_{GS}=-4.5V$) < 34m Ω
- $R_{DS(ON)}$ (at $V_{GS}=-2.5V$) < 57m Ω
- ESD Protected Up to 2.0KV (HBM)

General Description

- Low $R_{DS(on)}$ & FOM
- Extremely low switching loss
- Excellent stability and uniformity
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- Power management
- Portable equipment

Limiting Values

Parameter	Conditions		Symbol	Min	Max	Unit
Drain-source Voltage			V_{DS}	-	-20	V
Gate-source Voltage			V_{GS}	-10	10	
Continuous Drain Current (Note 1,2)	Steady-State	$T_A=25^\circ C, V_{GS}=-4.5V$	I_D	-	-5.4	A
		$T_A=100^\circ C, V_{GS}=-4.5V$		-	-3.4	
Continuous Drain Current (Note 1,3)	Steady-State	$T_C=25^\circ C, V_{GS}=-4.5V, \text{Chip limitation}$		-	-14	
		$T_C=100^\circ C, V_{GS}=-4.5V$		-	-8.8	
Pulsed Drain Current	$T_C=25^\circ C, t_p \leq 10\mu s$			I_{DM}	-	
Maximum Body-Diode Continuous Current	$T_C=25^\circ C$		I_S	-	-9	
Total Power Dissipation (Note 1,2)	Steady-State	$T_A=25^\circ C$	P_D	-	1.48	W
		$T_A=100^\circ C$		-	0.59	
Total Power Dissipation (Note 1,3)	Steady-State	$T_C=25^\circ C$		-	10	
		$T_C=100^\circ C$		-	4	
Junction and Storage Temperature Range				T_J, T_{STG}	-55	

Thermal Resistance

Parameter		Symbol	Typ	Max	Units
Thermal Resistance Junction-to-Ambient (Note 2)	Steady-State	$R_{\theta JA}$	-	84	$^\circ C/W$
Thermal Resistance Junction-to-Case	Steady-State	$R_{\theta JC}$	-	12.4	

Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJQT034P02KAQ	F1	034P02	3000	30000	120000	7" reel



YJQT034P02KAQ

■ Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=-250\mu A, T_j=25^\circ C$	-20	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-20V, V_{GS}=0V, T_j=25^\circ C$	-	-	-1	μA
		$V_{DS}=-20V, V_{GS}=0V, T_j=150^\circ C$	-	-	-100	
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 10V, V_{DS}=0V, T_j=25^\circ C$	-	-	± 10	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A, T_j=25^\circ C$	-0.55	-0.85	-1.25	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=-4.5V, I_D=-9A, T_j=25^\circ C$	-	25	34	$m\Omega$
		$V_{GS}=-2.5V, I_D=-4.5A, T_j=25^\circ C$	-	42	57	$m\Omega$
Diode Forward Voltage	V_{SD}	$I_S=-9A, V_{GS}=0V, T_j=25^\circ C$	-	-0.9	-1.2	V
Gate Resistance	R_G	$f=1MHz, T_j=25^\circ C$	-	16	-	Ω
Dynamic Parameters						
Input Capacitance	C_{iss}	$V_{DS}=-10V, V_{GS}=0V, f=1MHz, T_j=25^\circ C$	-	540	-	pF
Output Capacitance	C_{oss}		-	120	-	
Reverse Transfer Capacitance	C_{rss}		-	100	-	
Switching Parameters						
Total Gate Charge	Q_g	$V_{GS}=-4.5V, V_{DS}=-10V, I_D=-8A, T_j=25^\circ C$	-	6.5	-	nC
Gate-Source Charge	Q_{gs}		-	0.5	-	
Gate-Drain Charge	Q_{gd}		-	2.5	-	
Reverse Recovery Charge	Q_{rr}	$I_F=-8A, di/dt=100A/\mu s, V_{GS}=0V, V_R=-10V, T_j=25^\circ C$	-	12	-	nC
Reverse Recovery Time	t_{rr}		-	26	-	ns
Turn-on Delay Time	$t_{D(on)}$	$V_{GS}=-4.5V, V_{DS}=-10V, I_D=-8A, R_{GEN}=3\Omega, T_j=25^\circ C$	-	10	-	ns
Turn-on Rise Time	t_r		-	75	-	
Turn-off Delay Time	$t_{D(off)}$		-	35	-	
Turn-off Fall Time	t_f		-	32	-	

Note:

- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- The value of $R_{\theta JA}$ is measured with the device mounted on the 40mm*40mm*1.1mm single layer FR-4 PCB board with 1 in² pad of 2oz. Copper, in the still air environment with $T_A=25^\circ C$. The maximum allowed junction temperature of 150 $^\circ C$. The value in any given application depends on the user's specific board design.
- Thermal resistance from junction to soldering point (on the exposed drain pad).



Typical Electrical and Thermal Characteristics Diagrams

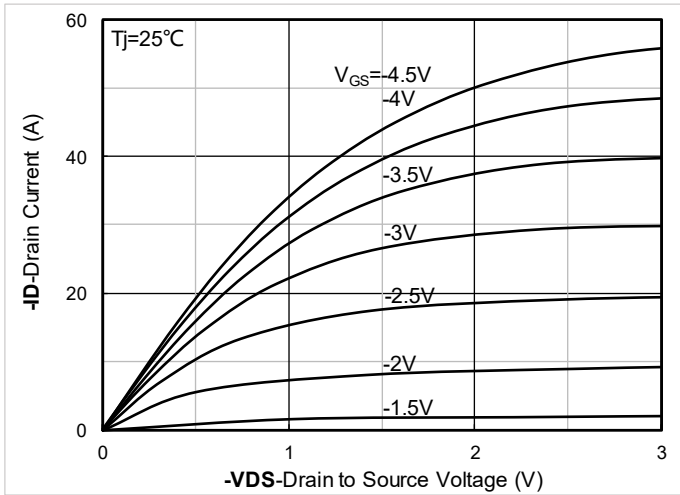


Figure 1. Output Characteristics; typical values

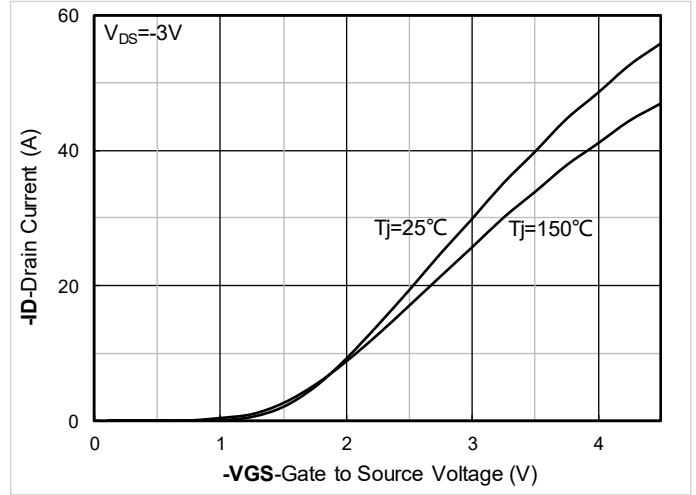


Figure 2. Transfer Characteristics; typical values

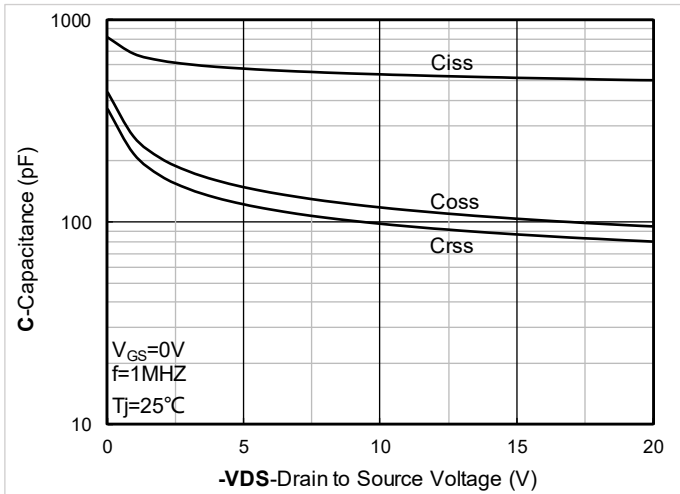


Figure 3. Capacitance Characteristics; typical values

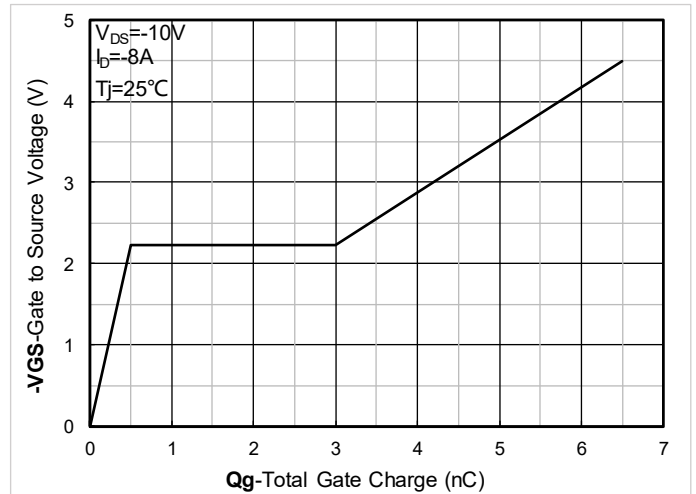


Figure 4. Gate Charge; typical values

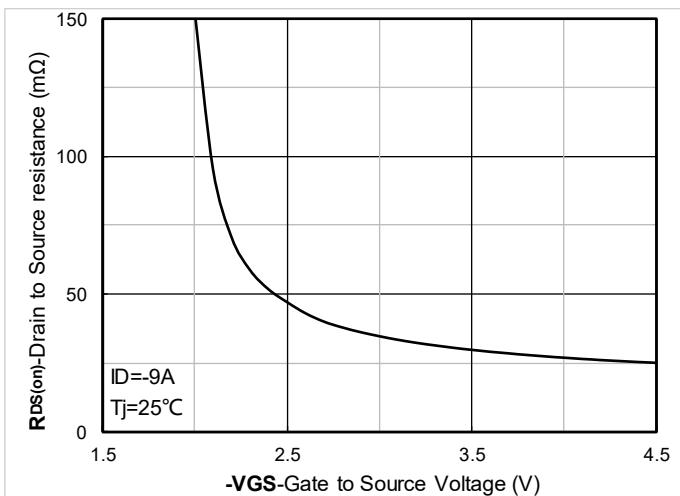


Figure 5. On-Resistance vs Gate to Source Voltage; typical values

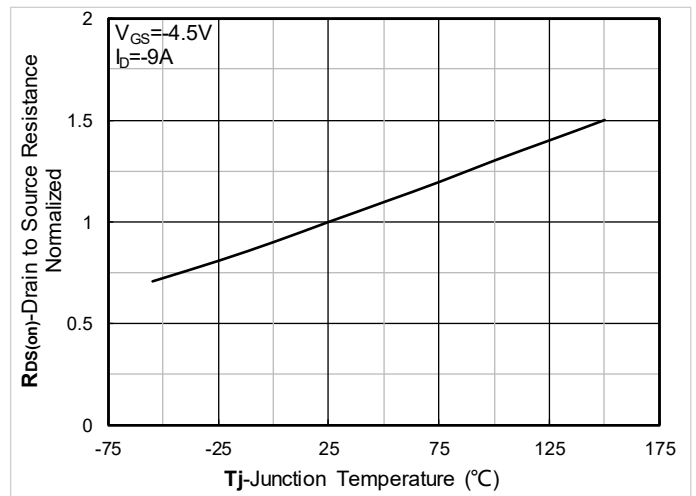


Figure 6. Normalized On-Resistance



YJQT034P02KAQ

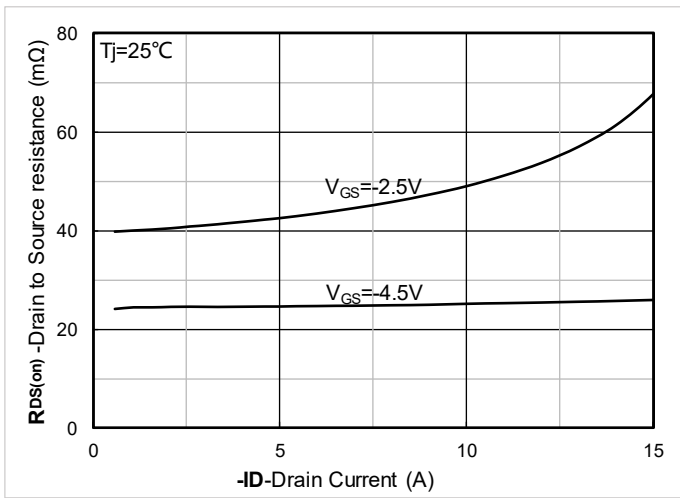


Figure 7. RDS(on) VS Drain Current; typical values

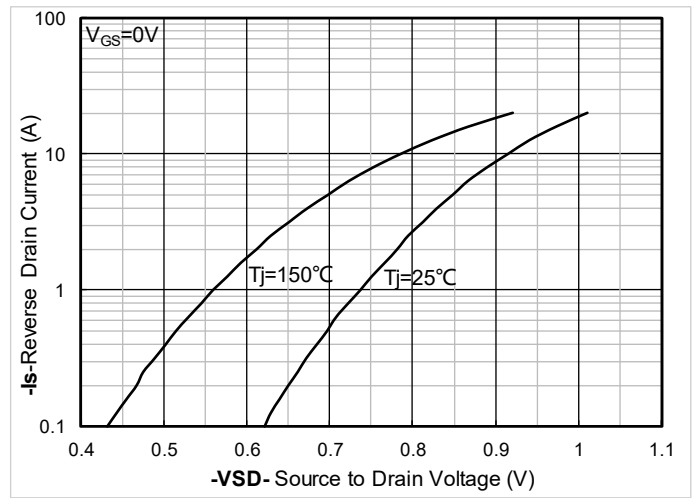


Figure 8. Forward characteristics of reverse diode; typical values

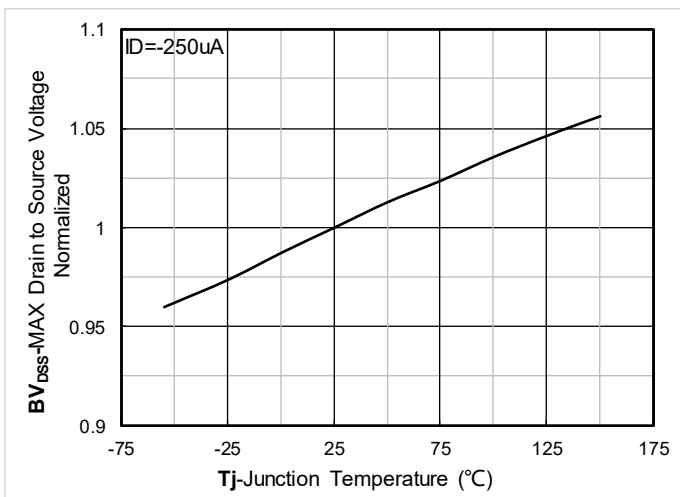


Figure 9. Normalized breakdown voltage

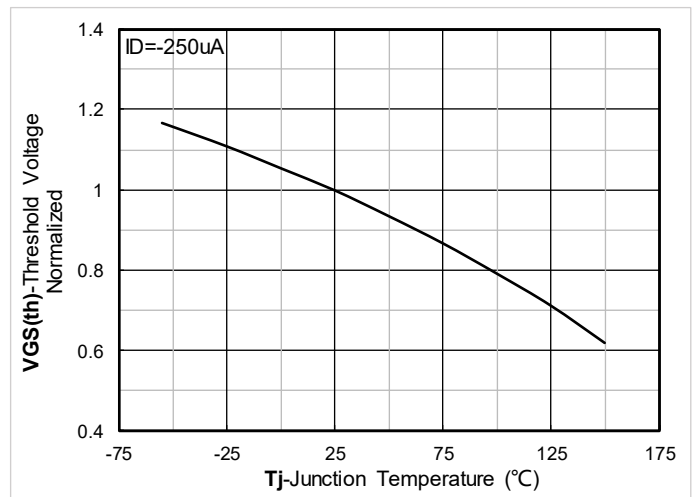


Figure 10. Normalized Threshold voltage

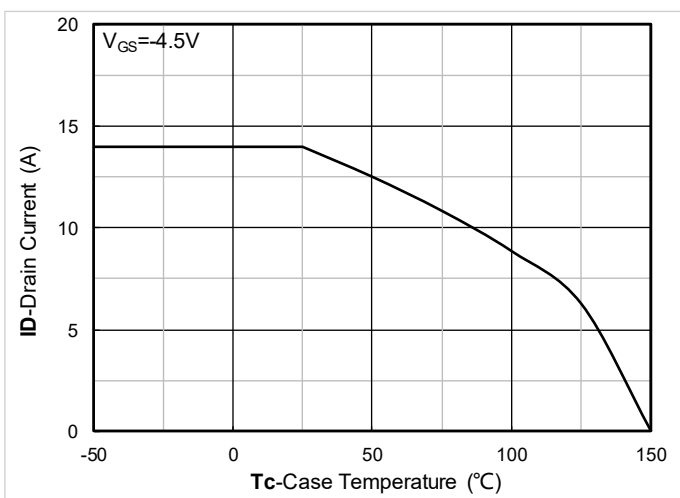


Figure 11. Current dissipation

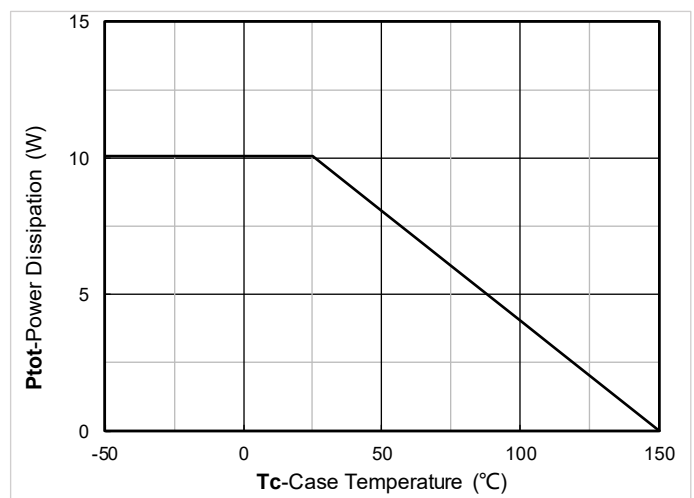


Figure 12. Power dissipation



YJQT034P02KAQ

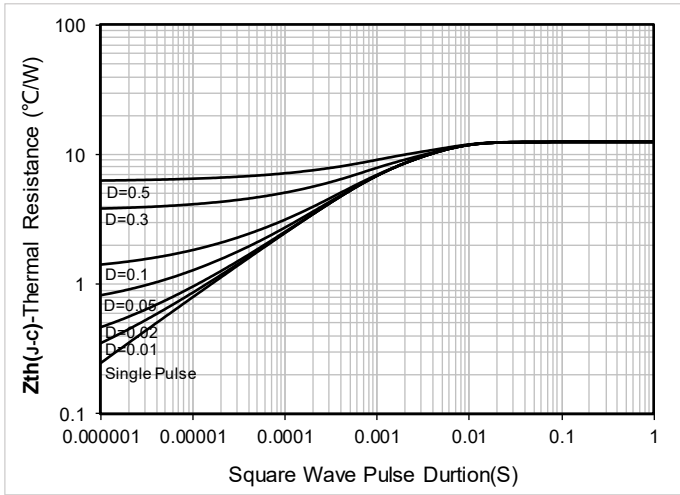


Figure 13. Maximum Transient Thermal Impedance


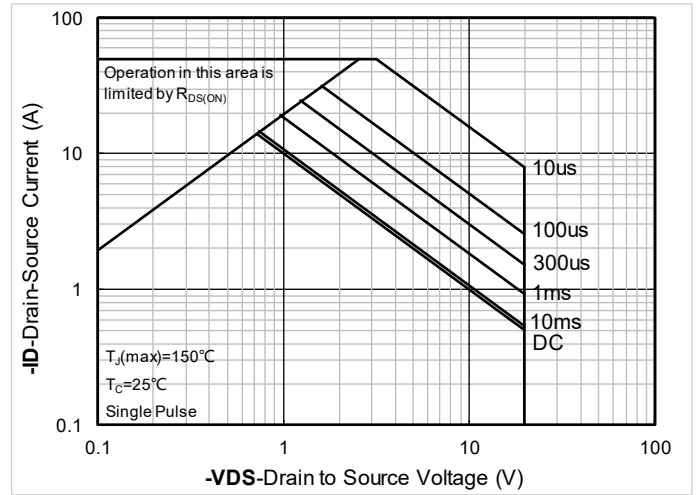


Figure 14. Safe Operation Area




YJQT034P02KAQ


DFN2020-6L-H-0.65MM Package information



Top View
正面视图



Bottom View
背面视图



Side View
侧面视图

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	1.90	2.00	2.10
E	1.90	2.00	2.10
A	0.55	0.65	0.75
A1	0.20 BSC		
A2	0		0.10
D1	1.00	1.10	1.20
D2	0.20	0.25	0.35
E1	1.10	1.20	1.30
E2	0.51	0.56	0.66
Lp	0.20	0.25	0.35
J	0.27 BSC		
J1	0.64 BSC		
b	0.20	0.30	0.40
e	0.65 BSC		

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.10 mm.
3. The pad layout is for reference purposes only.



YJQT034P02KAQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.